ϵ





Flexible, Electrically Heated Hoses

100% Compatible




HEATING HOSE TECHNOLOGY

Industrial Heated hoses are designed for applications where the media passing through the hose must be heated, melted but first of all, maintained at constant, elevated temperature. Application for such media as: oil, grease, wax, resins, hot melt adhesives, plastic, paints, granulates, food products.

Advantages of using Heating Hoses are;

- Flexible structure solves the problems related to alignment and machine vibration,
- Provides short heating times and homogeneous heat dissipation,
- Safe, economical and long lasting products.

With decades of experience in heated hoses, **OGAN Industrial Heating Hoses** are developed and produced to transport of materials within specified temperature ranges, under high pressure and temperatures. **OGAN Industrial Heating Hoses** are being used in a wide range of applications from manual hand gun to industrial robotic, for indoors and outdoors and they are fully compliant with the systems of leading manufacturers worldwide.

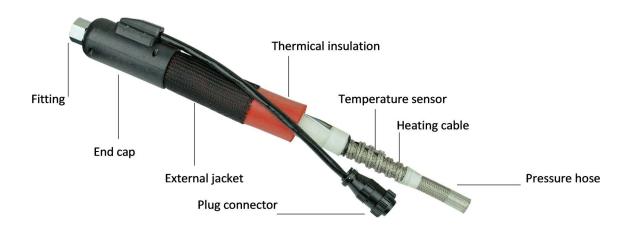

The **pressure hose** is chosen depending on the working pressure, temperature and medium output required. We mainly use PTFE hose in stainless steel braid. The material of this hose features outstanding chemical and temperature resistance (up to 250 °C), and very low coefficient of friction. PTFE hoses with strong mesh technology are being used to safely transfer the heated products up to 500 bar.

The hose **fittings** at both hose ends are selected according to customer's specification. OGAN hoses can be supplied with all types of fittings available on the market.

Heating element is helically wound around the pressure hose to provide accurate and uniform heat density at each point of the hose. The power of the heating element depends on the temperature that must be maintained, the diameter and length of the hose.

OGAN heating hoses have an **integrated sensor**. According to the process and preferences; PT100, Ni120, NTC, J, K, PT1000 type heat sensors are used.

Thermal insulation material is applied to reduce the heat loss to minimum and to ensure that the system reaches the specified temperature. Type of thermal insulation depends on working temperature. OGAN heating hoses uses silicone foam up to 250°C.

OGAN Heating Hose is equipped with a connecting cable with a preferred length, and with or without a **plug**. The hoses can be used with a temperature controller of the customer or supplied with various types of temperature controllers.

Polyamide braid is usually applied as **external jacket** of OGAN Heating Hoses, but steel braid, polyurethane braid or silicone braid are also available. External jacket, meets the static and dynamic bending requirements and ensures that the thermal insulation material and the heating elements remain undamaged.

There are two types of hose **end caps**: hard and soft. The hard caps made of polyamide reduce free, flexible hose length between the fittings, but also reduce the load on the spot of critical fittinghose connection. Silicone soft caps, due to their flexibility, are recommended for short hoses.


HT700 CO-EXTRUSION HEATING HOSES

OGAN HT700 Co-extrusion Heating Hoses are produced to transfer melted plastic and thermoplastic materials from co-extruder to mold at defined temperatures.

HT700 Co-extrusion Heating Hoses are produced from high temperature and pressure resistant T3 PTFE hoses;

- Provides flexible connection between the co-extruder and mold,
- Simplifies mold changes and maintenance,
- Minimizes the thermal expansion and vibration occured from heating.



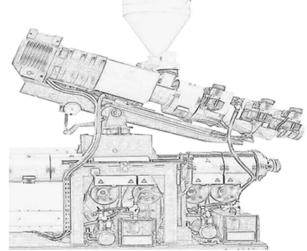

Maximum operating temperature	250 °C
Voltage	230 V AC/DC 50/60 Hz
Pressure hose	T3 PTFE
Fittings	Carbon – Stainless steel
Thermal insulation	Silicon foam
End cap	Hard cap / Silicon cap
External jacket	Polyamide braid black
Power cable	Standard 2 x 1.5 m
Temperature sensor	Fe-CuNi (J) , PT100 , NiCr-Ni (K)
Sensor tolerance	+5 / -10
Protection class	IP54
Certificates	CE



T3 Pressure Hose DN (mm)	8	10	12	16	20
Working pressure (Bar)	475	475	450	400	300
Bursting pressure (Bar)	1900	1900	1800	1600	1200
Bending radius (mm)	85	110	150	175	200
ID of fitting	6,0	7,0	10,0	12,5	16,0
Fitting BDN-M	16x1.5	18x1.5	22x1.5	26x1.5	30x2
Fitting BDN	G 3/8"	G 1/2"	G 1/2"	G 3/4"	G 1"
Working pressure @ 20 °C (Bar)	475	475	450	400	300
Working pressure @ 100 °C (Bar)	451	451	428	380	285
Working pressure @ 150 °C (Bar)	428	428	405	360	270
Working pressure @ 200 °C (Bar)	394	394	374	332	249
Working pressure @ 250 °C (Bar)	285	285	270	240	180



STANDARD HEATING HOSES



OGAN Heating Hoses developed and produced for leading manufacturers glue systems are produced from hi-tech components.

They are used to transfer heated thermoplastic (PSA,EVA,PO) and reactive (PUR) glues. OGAN Heating Hoses are highly flexible for manual hand gun and robotic applications and extra strengthened to prevent external and internal structural deformation which may occur from dynamic movements.



- 100% compliant with leading manufacturers systems,
- Available in Standard, High-Pressure and Water-Protected versions,
- Can be developed and produced based on customer specific requests.

RB400 HEATING HOSES - AUTOMATION



OGAN RB400 Heating Hoses are developed and produced to transfer adhesive material from mastic pump to robot tip under high pressure and specified temperatures. Used at industrial robotic applications, mainly in automotive sector.

OGAN RB400 Heating Hoses are highly flexible and extra strengthened to prevent external and internal structural deformation which may occur from dynamic movements. They are 100% compliant with the systems produced by leading manufacturers.



GN SERIES HANDGUNS

OGAN GN Series Handguns are developed for increasing flexibility of adhesive applications and ease the usage. OGAN GN Series handguns provide constant operational temperature up to 210 °C, which guarantees continuous adhesive flow. These hand-held compact guns are designed to endure the roughest working conditions, their durable external and internal components provide long service life.



- Standard swivel joints of GN410 guns rotate 360° on their own axis. Ball type swivel joints can move in all directions and can be supplied optionally. Ball type swivel joint reduces the load of the hose and provides ease of application to the operator.
- GN310 gun hose can be produced with corrugated flexible polyamide external jacket upon request.
- GN310 ve GN600 models are equipped with trigger operated air valve for spray applications. Spray air hose passes under the insulation layer of the heated hose and connected to the heating block of the gun. Thus ensures that the spray air, carried up to the nozzle tip is heated.

- 100% compliance with piston and gear pump melter systems of leading manufacturers.
- Lightweight and ergonomic.
- Specially formulated plastic structure is extra heat resistant and shockproof.
- Ratary fittings enable handgun to rotate 360° without twisting the hose, which allows wide range of movement and high flexibility.
- Trigger lock mechanism ensures that the handgun is safely secured when not in use.
- Standard nozzles for bead and spray applications, specific nozzles can be developed.
- Set up for bottom-feed or top-feed hose connection.











WORLDWIDE DIRECT SUPPLY

We are proud to be the only company in Turkey, producing Industrial Heating Hoses since 2000. We provide long-lasting, high-quality products worldwide. As a global player, we supply and support international customers on all continents, directly from our factory in Istanbul.





Headquarters

Ogan Endustriyel Isi Hortum San. Ltd. Sti.Deri OSB, 3 Nolu Giris, Yan Sanayi Cad.
Biye Sok. No:31 Aydinli
Tuzla 34953 İstanbul, Turkey

Tel: +90 216 591 0343

+90 533 469 1009 (for English)

e-mail: info@ogan.com.tr

foreigntrade@ogan.com.tr (for English)

Web: www.ogan.com.tr

UK Distributor

Hot Melt Services Ltd.
Unit 3, Wymeswold Industrial Park,
Burton On The Wolds, Loughborough,
LE12 5TR United Kingdom.

Tel: +44 1509 889 511

e-mail: services@hotmeltservices.com

Web: https://hotmeltservices.com

